

LONFLOOR PLAIN

LONSEAL

LONFLOOR PLAIN is a high-performance heterogeneous sheet vinyl flooring solution that is available in tonal, neutral color ways that will add interest and sophistication to any space.

STANDARD SIZES (nominal)


- Overall thickness:** 0.100" (2.5 mm)
- Wear layer thickness:** 0.031" (0.8 mm)
- Roll Size:** 6' (1.83 m) wide x 60' (18.3 m)
- Weight:** 0.8 lb/sq. ft., 295 lbs/roll
- Colors:** Six available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOC's
- Floorscore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
 - Low Emitting Materials
- Adhesives and Sealants: IEQ Credit 4.1
- Flooring Systems: IEQ Credit 4.3

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

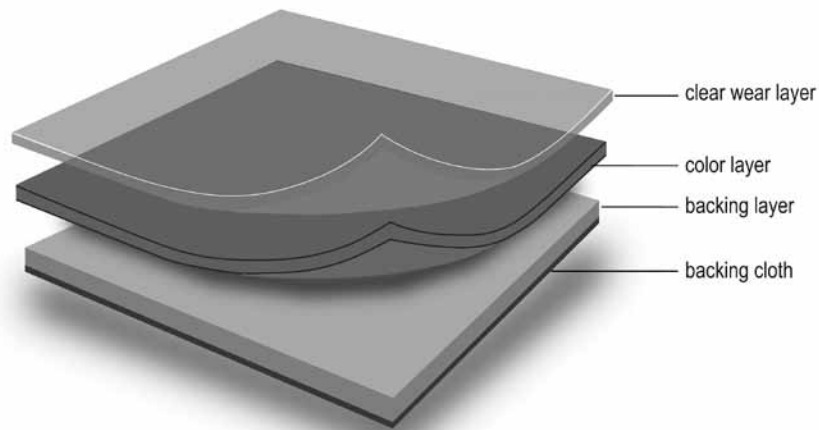

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	90
James Machine, SCOF, ASTM D2047.....	Neolite: 0.79, Neolite w/Finish: 0.81
Abrasion Resistance, ASTM D3884.....	0.4%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	800 PSI
Short-term Indentation, ASTM F1914.....	0.013" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 3.0, Change: 4.1
Dimensional Stability, ASTM F2199.....	0.18% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925.....	Slight Color Change: Gasoline

For detailed installation information, please refer to Lonseal's Technical Manual for Interior Flooring Products at www.lonseal.com.



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 09.26.11

JIS Q 9001:2004/JIS Q 9001:2000, the International Quality Assurance Standard
ISO 14001, Environmental Management Systems